


340A Cable Assembly



DIMENSIONS

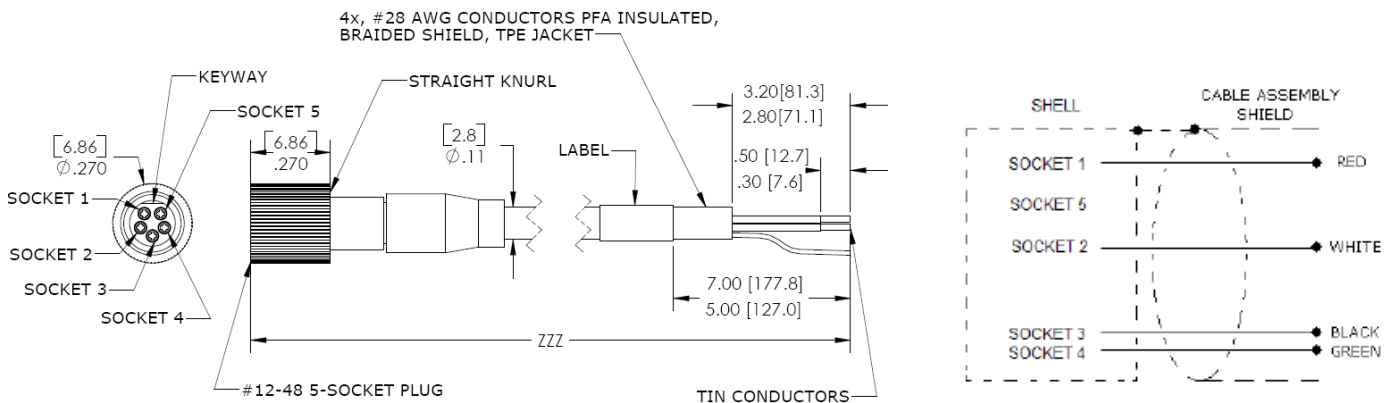

DESCRIPTION

Piezoresistive plug and play accelerometer cable assembly featuring #12-48, 5-socket plug. Standard cable length is 120 inches. Mates with accelerometer models 3801A, 4801A, 4810A, 4605.

FEATURES

- TPE Jacket
- PFA Insulated #28 AWG Conductors
- Braided Shield
- Straight Knurl on Socket
- 55°C to +125°C Temp Range

APPLICATIONS

- Flight Testing
- Laboratory Testing
- Vibration Monitoring
- General Purpose
- Shock Monitoring

340A Cable Assembly

ORDERING CODE

340A-ZZZ (-ZZZ designates length in inches, -120 standard)

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com